

## DS-2CC12D8T-AMM

### 2 MP Ultra-Low Light Indoor "Casino" Box Camera



The Hikvision DS-2CC12D8T-AMM 2 MP Ultra-Low Light Indoor Box Camera features a 2 MP high performance CMOS sensor with 1920 x 1080 resolution. True 120 dB WDR (Wide Dynamic Range) and 3D DNR (Dynamic Noise Reduction) enhance image quality. Up-the-Coax using Hikvision-C protocol allows camera control over the coaxial line for efficiency.

- 2 MP High Performance CMOS
- Ultra-Low Light
- 1920 × 1080 Resolution
- 120 dB True WDR, 3D DNR
- Up-the-Coax (HIKVISION-C)

#### Available Models:


DS-DS-2CC12D8T-AMM



# Specifications

DS-2CC12D8T-AMM	
<b>Camera</b>	
Image Sensor	2.0 megapixel progressive scan CMOS
Signal System	PAL/NTSC
Frame Rate	NTSC: 1080p @ 30 fps
Resolution	1920 (H) × 1080 (V)
Minimum Illumination	Color: 0.005 lux @ (f/1.2, AGC on), 0 lux with IR
Shutter Speed	NTSC: 1/30 s to 1/50,000 s
Lens Mount	C/CS mount
Auto-Iris	DC drive
Synchronization	Internal synchronization
WDR (Wide Dynamic Range)	>120 dB
<b>Menu</b>	
AGC	Supported
Day/Night Mode	Auto/color/BW (black and white)
White Balance	ATW/MANUAL
Privacy Mask	ON/OFF, 4 programmable privacy masks
Motion Detection	4 programmable motion areas
Backlight Compensation	Supported
3D DNR (Digital Noise Reduction)	Level 1 to 10
Language	English, Chinese
Functions	Brightness, sharpness, mirror
<b>Interface</b>	
Video Output	1 HD analog output/1 CVBS output (75 Ω/BNC)
<b>General</b>	
Operating Conditions	-22° to 140° F (-30° to 60° C), humidity: 80% or less (non-condensation)
Power Supply	12 VDC ±25% -A: 24 VAC ±25%
Power Consumption	Maximum 3 W
Material	Metal
Communication	Up-the-Coax, protocol: HIKVISION-C (TVI output)
Dimensions	2.73" × 2.13" × 2.2" (69.29 mm × 54 mm × 56 mm)
Weight	Approximately 0.39 lb (175 g)

# Dimensions

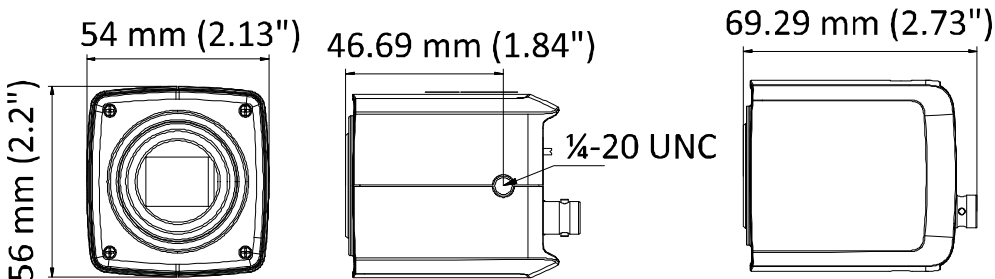

# Accessories

			
<b>TV2710D-MPIR</b> 2.7 mm – 10 mm, f/1.4 Manual Varifocal Lens	<b>WBS</b> Box Camera Short Wall Mount	<b>CHB</b> Outdoor Housing w/Bracket	<b>DS-1H18</b> Video Balun